

## Lite IP Series



## Lite HD-IP


7~  
22MM | 3MP | Day&Night  
ICR

IR Bullet Camera

### Features

- 3MP ( 2048 × 1536 ) full real time coding
- Max.re solution: 2048 x 1536
- ICR auto switch, true day / night
- 7-22mm Varifocal lens
- Up to 150FT IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Physical wide dynamic optional
- Support local CVBS video output, two-way voice intercom and PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P

### Dimensions

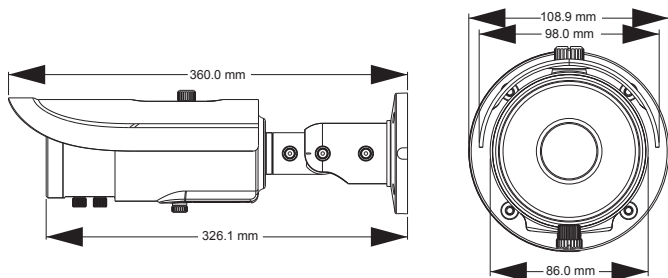

### Available Accessories



### Specifications

Model	VIC-330AB72
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 3 "CMOS
Image Size	2048 x 1536
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0 Lux ( IR LED ON )
Lens	7~ 22 mm
Lens Mount	Φ14
<b>Image</b>	
Video Compression	H.264 / MJPEG
Resolution	3MP ( 2048 × 1536 ), 1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 x 240
Multi-stream	3MP ( 1 ~ 30fps ) / 1920 x 1080 ( 1 ~ 30fps ) 1280 x 720 ( 1 ~ 10fps ) / D1 ( 1 ~ 30fps ) / CIF ( 1 ~ 30fps ) CIF ( 1 ~ 30fps ) / 480 x 240 ( 1 ~ 30fps )
Bit rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
<b>Interfaces</b>	
Network	RJ45
Audio	Two-way audio ( MIC IN × 1, MIC OUT × 1 )
Video Output	CVBS video output ( BNC × 1 )
Storage Card	Support SD card, the max capacity is 64GB
RS485	Yes
Alarm Input	1 CH
Alarm Output	1 CH
<b>Functions</b>	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	SD card local storage, network remote storage
Smart Alarm	Motion Alarm, Sensor alarm
Day & Night	ICR
PoE	Yes
IR Distance	50 ~ 70 m
Water-proof	IP66
<b>Others</b>	
Power Supply	DC 12V / PoE
Power Consumption	< 4W
IR Consumption ON	< 9.5W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions ( mm )	Φ109 × 360
Weight ( net )	1706g